



65371 U.S. PTO

08/800742



02/14/97

Case Docket No. 1233-272A

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of:

Inventor(s): PETER FIELD and DUNCAN KERR

For: ELECTROMECHANICAL CYLINDER LOCK

Enclosed are:

- ☐ A preliminary amendment.
- ☒ 16 sheets of specification.
- ☒ 7 sheets of claims.
- ☒ An abstract of the disclosure.
- ☒ A declaration/power of attorney signed by the inventor(s).
- ☒ 12 sheets of drawings.
- ☐ A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27.
- ☐ Priority is claimed from _____ application No. _____, filed _____.
- ☐ An Information Disclosure Statement.
- ☒ An assignment recordation cover sheet and an assignment of the invention to Medeco Security Locks, Inc.

The filing fee has been calculated as shown below:

	Number filed	Number extra	Non-Small Entity Rate
Base Fee			\$ 770.00
Total Claims	26 - 20 =	6	x \$ 22.00 = 132.00
Independent Claims	4 - 3 =	1	x \$ 80.00 = 80.00
Multiple Dependent Claim Presented		NONE	+ \$260.00 = 0
Total filing fee.....			\$ 982.00

- ☒ A check in the amount of \$982.00 is attached.
- ☒ A check in the amount of \$40.00 to cover the assignment recordation fee is attached.
- ☒ The Commissioner is hereby authorized to charge payment of any additional filing fees under 37 CFR 1.16, or credit any overpayment to Deposit Account 02-2135. A duplicate copy of this sheet is attached.

Please charge any fee or credit any overpayment pursuant to 37 CFR
1.16 or 1.17 to Deposit Account No. 02-2135.

Respectfully submitted,

ROTHWELL, FIGG, ERNST & KURZ, p.c.

By Vincent M DeLuca
Vincent M. DeLuca
Attorney for Applicants
Registration No. 32,408

555 Thirteenth Street, N.W.
Suite 701 East Tower
Washington, D.C. 20004
Telephone: (202)783-6040

0360074 0349

12
1233-272A



982.00-101-A

ELECTROMECHANICAL CYLINDER LOCK

BACKGROUND OF THE INVENTION

Field of the Invention

5 The present invention relates generally to an electromechanical cylinder lock and, in particular, to a cylinder lock in which an electrical actuator is employed to provide access to the lock cylinder.

Description of Related Art

10 Electromechanical locking devices are known which include electrically interfaced or controlled release mechanisms for operating a lock cylinder. For example, U.S. Patent No. 4,712,398 discloses an electronic locking system comprising a lock cylinder with a rotatable plug located therein. An electronically activated release
15 assembly is provided which selectively disengages a locking pin from the plug to allow turning of the key to rotate the plug relative to the cylinder. The lock cylinder and key each include an electronic memory device containing keying system codes. Upon insertion of the
20 key the release mechanism disengages the locking pin from the plug to allow its rotation. U.S. Patent No. 5,552,777 discloses another type of electromechanical cylinder lock having a blocking pin and an
25 electromagnetic solenoid in the cylinder plug. The blocking pin extends into a recess in the cylinder shell, and is retracted upon actuation of the solenoid by a microprocessor in the key.

2025 RELEASE UNDER E.O. 14176

One benefit of including electronic control features in locks is the ability to provide increased keying codes for operating the lock. For example, information can be stored in the lock and/or key such that the locking mechanism is activated in response to detecting and/or exchanging data. As the information stored in the components may be altered, it is possible to vary the keying codes without changing the system hardware. In contrast, changing the mechanical keying codes in a purely mechanical lock typically requires forming a new key with different bitting surfaces, a more involved process than reprogramming electronic components of an electromechanical lock.

Despite progress made in the development of prior art electromechanical locking systems, several deficiencies exist which leave room for improvement. For example, prior art systems do not provide the ability to retrofit a purely mechanical lock to form an electromechanical lock which is operated at least in part by information stored in a key and/or lock cylinder. The benefits of retrofitting a mechanical lock in this manner include preventing the need to alter the keying of the lock should it become necessary to change the combination, for example when an employee loses his or her key or leaves an establishment. In such a case, the components of the lock may be reprogrammed to change the keying codes to prevent the employee's key from operating the lock. Additionally, prior art systems using electromagnetic components such as solenoids have been found to be impractical, because of the small space available and the relatively large size of components needed to develop enough force to release the blocking

mechanism. Accordingly, there remains a need in the art for an improved electromechanical cylinder lock system.

SUMMARY OF THE INVENTION

5 The present invention provides an electro-mechanical cylinder lock having at least one, and preferably dual locking features. The lock includes an outer shell or cylinder member, a plug or barrel rotatably mounted within the shell, and a plurality of tumbler pins which are lifted to a shear line of the barrel and shell to
10 operate the lock. A side bar or fence member is provided and cooperates between the shell and barrel to selectively block or permit rotation of the barrel. The side bar has an outer edge located in a recess formed in the shell and is spring biased toward the recess. In a
15 blocked position, the side bar prevents rotation of the barrel. To permit rotation of the barrel, the side bar is moved out of the cavity and toward the barrel by a camming action in order to permit rotation of the barrel. The side bar is prevented from being cammed by a slider
20 bar positioned against the side bar. When an authorized key is inserted into the lock, a controller device in the lock activates an actuator mechanism to move the slider bar to a position over a recess in the side bar, thus allowing the side bar to be cammed into the barrel by
25 rotation of the barrel.

The controller device, for example a microprocessor located within or outside the barrel, has data stored therein including authorized codes for operating the lock. The control device compares data read or detected
30 from the user's key with the stored data to determine whether the actuator mechanism should be activated to move the slider bar to an unblocking position with

respect to the side bar. The lock cylinder can include a keyway and a plurality of tumbler pins, the keyway receiving a key which is bitted to position the pins at a shear line which permits the barrel to be rotated.

5 Alternatively, the locking mechanism may be of a type which does not utilize tumbler pins. The key is provided with means for storing data, for example, a microchip, magnetic data-encoded strip, and the like, such that upon insertion into the keyway the controller
10 device compares data transmitted by the key to determine whether the attempt to operate the lock is authorized, and if so, activates the actuator mechanism to move the slider bar to an unblocking position.

15 In a preferred embodiment, the actuator mechanism includes a length of shape memory alloy material (one example of which is nitinol wire) attached to the slider bar and electrically coupled to the controller device. Shape memory alloy is a material which can be set to deform when heated. For example, a length of nitinol
20 wire may be formed such that upon heating, such as by passing a small amount of current through the nitinol wire, the wire will contract, causing the slider bar to be moved to the unblocking position, allowing the side bar to be cammed by rotation of the cylinder barrel.

25 An important benefit of the invention resides in the fact that the side bar, slider bar and electrically powered actuator device are entirely (or substantially entirely) contained within the barrel. This permits the entire barrel to be removed and placed in the outer
30 shells of different lock cylinders. The invention permits the barrel to be substituted for the barrel of a purely mechanical cylinder lock to retrofit the lock into an electromechanical lock system. In addition, the

invention contemplates utilizing different but interchangeable electromechanical barrels with a plurality of lock cylinders in a lock system. Moreover, the compact, removable barrel may carry some or all of the electronic hardware, firmware and/or software associated with the lock to provide even greater flexibility in various applications.

According to another aspect of the present invention, a thermal interlock mechanism is provided to prevent attempts at circumventing a heat-actuated lock release through external heating of the lock, by disabling the lock upon such external heating.

BRIEF DESCRIPTION OF THE DRAWINGS

Other objects, features and benefits of the invention will become apparent from the detailed description of preferred embodiments set forth below, taken in conjunction with the accompanying drawing figures, wherein:

FIG. 1 is a rear elevation view in section of a lock cylinder including a shell, a rotatable plug containing movable locking members, and a side bar constructed according to one embodiment of the present invention, the movable locking members and side bar being oriented in a cylinder locking position;

FIG. 2 is an exploded view of the side bar locking mechanism assembly according to a first embodiment of the present invention;

FIGS. 3A and 3B are three dimensional views of the side bar assembly according to the first embodiment of the present invention, in a locked and unlocked position, respectively;

FIG. 4 is an exploded view of the side bar locking assembly according to a second embodiment of the present invention;

5 FIGs. 5A and 5B are three dimensional views of the side bar assembly according to the second embodiment of the present invention, in a locked and unlocked position, respectively;

10 FIGs. 6-9 are three dimensional views of various configurations of pusher and rocker mechanisms for the slider bar actuator device of the present invention;

FIGs. 10-12 are views of various configurations for non-resettable thermal interlocks for the actuator device of the present invention;

15 FIGs. 13-15 are view of various configurations for resettable thermal interlocks for the actuator device of the present invention;

FIG. 16 is a perspective view of a cylinder barrel according to the present invention, illustrating one possible location for the controller device;

20 FIG. 17 is a circuit block diagram showing one embodiment of a data carrying key for use with the present invention;

25 FIG. 18 is a circuit block diagram showing one embodiment of the electronics of the lock which controls activation of the shape memory alloy actuator device; and

30 FIG. 19 is a partial phantom top view of an alternative embodiment of the invention wherein a shape memory alloy actuator device is used in conjunction with a tumbler pin blocking mechanism instead of a side bar blocking mechanism.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference to FIG. 1, a first embodiment of the present invention is indicated generally by the reference numeral 10 and includes a cylinder or outer shell 20

5 having a bore 22 in which is positioned a rotatable barrel or plug 30. The barrel 30 has an outer surface substantially corresponding to the bore 22 of the shell and includes a keyway 34 configured to receive a key as is known in the art. The barrel 30 includes a plurality
10 of tumbler pin bores which receive tumbler pins (not shown) as is known in the art. The manner in which a properly bitted key (not shown) engages the tumbler pins and positions them at a shear line to permit the barrel 30 to be rotated with respect to the shell 20 is known in
15 the art and thus will not be described in any great detail herein. However, it should be noted that the tumbler pins may be simply lifted by the biting surfaces on the key, or they may be lifted rotatively by a key including skew cut biting surfaces, such as that used
20 with a Medeco®-type cylinder lock, such as disclosed in U.S. Patent No. 4,732,022, incorporated herein by reference in its entirety.

The shell 20 includes a cavity 24 in which is positioned a side bar or fence 60 which cooperates with
25 the barrel 30 to either block or permit rotation of the barrel within the shell. As discussed below, the upper wall of the cavity 24 is formed as a camming surface for moving the side bar out of the barrel upon rotation of the barrel. As can be seen in FIG. 1, the side bar is
30 received in cavity 24 and its inner edge extends beyond the internal surface of shell bore 22 and engages the barrel 30 to prevent the barrel from rotating to operate the lock. However, when the slider bar 50 is moved to

the unblocking position shown in FIG. 3B, the barrel may be rotated to cam

side bar 60 out of cavity 24 so as to clear the inner surface of bore 22 and permit rotation of the barrel 30 with respect to the shell 20.

As described in the '022 patent, one or more side bar springs (not shown) may be positioned between the inner edge of the side bar 60 and the barrel. The springs bias the side bar into cavity 24, and the slider bar 50 blocks the side bar from being cammed and thereby prevents the barrel from rotating.

FIG. 2 is an exploded view of a side bar assembly according to a first embodiment of the present invention. The assembly includes side bar 60, and an actuator device including a slider bar 50, a rocker 70, a shape memory alloy wire 80, a pusher 90, and a spring 100.

In one preferred embodiment, the shape memory alloy wire 80 is made of nitinol. Nitinol is a shape memory alloy material (made of a NiTi alloy) which undergoes a crystalline phase change when heated, causing it to contract or to expand, depending on whether the material is pre-stressed to be in a compressed state or a stretched state. The phase change occurs almost instantaneously at a specific temperature, which can be specified in commercial grades of nitinol wire. Nitinol wire is commercially available, for example from Dynalloy, Inc. under the trade name Flexinol.

While the use of nitinol is described hereinafter as the shape memory alloy material for purposes of illustration of a preferred embodiment of the invention, it will be noted that the present invention is not limited to the use of nitinol, but may be implemented by using any other appropriately suitable material.

Examples of other known shape memory alloy materials include Cu-Al-Ni, Fe-Mn-Si-Cr-Ni, and Cu50-Zr50. Shape memory alloy materials are also commercially available from Shape Memory Applications, Inc., Santa Clara, CA.

As shown in FIG. 3A, the slider bar 50 is normally biased by spring 100 in a blocking position with respect to side bar 60, such that the side bar cannot be cammed out of the cavity 24 in the shell and thus preventing rotation of the barrel. As shown in FIG. 3B, upon activation of the nitinol wire 80, by passing a predetermined amount of electric current through it, the wire 80 will contract, pulling rocker 70 against pusher 90, which pushes slider bar 50 against the force of spring 100 to a position over a recess 61 in the side bar 60. As such, the side bar 60 may be cammed into the barrel by rotation of the barrel, allowing the lock to be opened.

Preferred specifications for nitinol actuator wire to perform 100,000+ cycles are as follows:

maximum strain	4%
maximum contraction stress	~25,000 psi
biasing stress	~5,000 to 10,000 psi
transition temperature	60 to 110°C

It is possible to over stress the wire if it is heated too quickly and is subjected to a high inertial load when it starts to contract. The wire also can be overstressed if it is prevented from contracting to its full strain point while being heated to its transition temperature. Appropriate design considerations can eliminate these possibilities.

5 The rocker and pusher components provide a lever arm
arrangement which serves to provide the appropriate
amount of displacement of the slider bar in response to
the maximum tolerable contraction strain on the length of
nitinol wire available for use in a typical cylinder
barrel volume. Some possible variations on the design of
the rocker and pusher components are shown in FIGs. 6-9.
As shown in FIG. 6, rocker 70a has a groove for
accommodating the nitinol wire 80 (formed into a crimped
loop as shown in FIG. 7B). The rocker 70a abuts against
an integral slider and pusher element. FIG. 7A shows a
rocker 70b having ball-shaped ends for facilitated
motion. FIG. 8 shows a "bent pin" rocker configuration
70c, and FIG. 9 illustrates a "turned groove" rocker
configuration 70d, wherein the nitinol wire is crimped to
the rocker for more secure operation.

An alternative embodiment of the side bar assembly
according to the present invention is shown in FIGs. 4,
5A and 5B. In this embodiment, the nitinol wire actuator
81 is used to pull a transverse slider bar 51 in a
direction perpendicular to the side bar 60. A slider
insulator 52 is inserted into an aperture in the slider
bar 51 and the nitinol wire is threaded through the
insulator 52, as shown in FIGs. 5A-5B. A plug insulator
53 is attached to the end of the nitinol wire or to the
plug itself. A spring 101 is inserted into another
aperture in the slider bar 51 and serves to maintain
slider bar 51 normally biased such that an extension on
the side bar 60 (not shown in the view) is located below
recess 54 in the slider bar 51, as shown in FIG. 5A.
When the nitinol wire 81 is actuated, the contraction of
the wire forces the slider bar 51 down against the force
of the spring 101, causing the extension on the side bar

to be aligned with the recess 54 as shown in FIG. 5B, thereby allowing the barrel to be rotated, camming the side bar into the barrel.

Because the shape memory alloy actuator is activated by heat, if the lock were to be heated externally it may be possible to activate the wire. Accordingly, it is necessary to provide an external heat interlock mechanism to prevent external heating of the lock from improperly activating the nitinol wire to operate the lock. FIGS. 10-12 show various non-resettable heat interlocks. As shown in FIG. 10A, a low melting temperature solder 110 connects the nitinol wire to the controller device in the barrel. FIG. 10B shows low melt solder 111 provided as a cap on the pusher 90. In the event of external heating, the solder will melt, rendering the actuator mechanism inoperable. FIG. 11 shows a nitinol ring interlock 112 which is mounted in or adjacent to the plug. The nitinol ring 112 is prestressed to have a diameter such that a post 63 provided on side bar 60 is normally able to pass into or through the ring 112 when the side bar is actuated. However, in the event that the lock is externally heated, the ring 112 will shrink and will either clamp around post 63 or block post 63 from entering into the ring, thus preventing the side bar 60 from being actuated. FIG. 12 shows a nitinol spring 114 which is prestressed in a contracted state and is mounted adjacent to a notch 64 in a leg of side bar 60. If the lock is externally heated, the spring 114 will expand into the notch 64, thereby preventing the side bar from being retracted. Ring 112 and spring 114 as shown are single cycle interlocks, in that once triggered they render the lock permanently disabled. However, it is possible to configure the ring 112 and spring 114 such

that they will return to their prestressed state once they return to room temperature, thereby resetting the lock.

FIGS. 13-15 show resettable heat interlocks using various configurations of bimetallic strips. As shown in FIGS. 13A-13C, a preloaded bimetallic strip 115 may be provided adjacent to the side bar, which when heated will move to block the side bar, preventing movement. FIG. 13B shows the orientation of the bimetallic strip 115 relative to the side bar 60 at room temperature (viewed from inside the plug), allowing the side bar to be retracted (in a direction perpendicular to the drawing surface). FIG. 13C shows the orientation of the strip 115 when heated. In this instance, the strip 115 will flex upward into the path of the side bar 60, preventing it from being retracted (i.e., preventing the side bar from moving in the perpendicular direction out of the page). The thermal interlock shown in FIGS. 13A-13C must be externally reset once triggered. FIGS. 14 and 15 show automatically resetting bimetallic strips 116 which act in opposition to the nitinol wire when heated externally, also preventing the side bar from being moved. As soon as the bimetallic strips cool to their ambient temperature, they return to their normal positions, thus allowing the lock to be reset.

Examples of the electronic control circuitry for actuating the nitinol wire is shown in FIGS. 17 and 18. These diagrams correspond to one preferred electronic security system control as disclosed in U.S. Patent No. 5,140,317, also incorporated by reference herein in its entirety. However, any equivalent electronic control circuit may be used without departing from the invention.

FIG. 17 is a schematic block diagram illustrating the components within an electronic key housing 104. The components include a microcontroller or microprocessor 501, an electrically erasable programmable read only memory (EEPROM) 502 coupled to the controller 501, an oscillator or clock 503 which provides clock signals for the operation of controller 501, and a battery power source 504 which operates the controller 501. The battery 504 may also be used to provide power to the circuitry within the lock. However, the lock may be provided with its own battery power source under appropriate circumstances. The electronic key components further include an electronic switch 505 operated by the controller 501 and a power sensing circuit 506.

Figure 18 is a representative schematic block diagram of electronic circuitry 208 within the lock. An example of the location of the circuitry is shown in FIG. 16. This circuitry includes a microprocessor 601, an EEPROM 602 coupled to the microprocessor 601, an oscillator or clock 603 for providing operational clock signals to the microprocessor 601, a power filter 604, electronic switch 605 and load 606 for transmission of signals to the key controller 501 via line 607, and an electronic switch 608 for allowing power to flow from power source 504 within the key housing 104 through cable 107 and contacts 103-206 through the nitinol wire 80 to ground, to activate the nitinol wire. Alternatively, the power source for the nitinol wire may be a separate battery located within the lock cylinder or cylinder barrel, or external to the cylinder.

In operation, the microprocessor 601 within the lock makes a determination as to whether the key inserted into the

keyway is authorized to operate the lock, based upon a comparison of data received from the key with data stored in the memory associated with the microprocessor 601. The data used for comparison may be generated pseudorandomly by the microprocessor 601 in accordance with a stored algorithm.

In summary, the invention permits conventional mechanical locks to be retrofitted into electro-mechanical locks. For example, a conventional lock, which includes a plurality of tumbler pins that are both raised to a shear line and rotated to a position to accept the legs of a side bar by inserting a properly bitted key into the keyway, can be retrofitted by replacing the barrel with an electromechanical barrel constructed according to the invention. The electromechanical barrel includes a keyway with a plurality of tumbler pins and a slider bar, the slider bar being moved by a nitinol actuator mechanism so as to permit the side bar to be retracted and the lock operated. In this manner, a purely mechanical lock, which is subject to the limitations discussed above, may be retrofitted into an electromechanical lock which provides the benefits associated with utilizing an electronically controlled locking feature.

FIG. 19 illustrates an alternative embodiment of the present invention wherein a shape memory alloy actuator is used in conjunction with a tumbler pin blocking mechanism. According to this embodiment, a spinner 700 which engages a notch 712 in a tumbler pin 710 is provided in the plug 30. The spinner 700 is biased into the notch 712 by a spring force 704. A shape memory alloy actuator 706 is provided to actuate a slider 708 which engages a boss 702 on the spinner 700.

In operation, at least one tumbler pin 710 is blocked or locked into the "up" position (i.e., through the shear line) by the spinner 700 being engaged in the notch 712. Upon insertion of an authorized key and successful transfer of data to the control device, the shape memory alloy actuator 706 is heated by passing a current therethrough, causing the actuator to contract. The contraction of the actuator 706 causes it to force the slider 708 against the spinner boss 702 in opposition to and overcoming the spring force 704. This causes the spinner 700 to rotate to the position shown in phantom in FIG. 19, disengaging it from the tumbler pin 710, and allowing the tumbler pin to fall and seat against the bitting of the inserted key. If the key bittings match the tumbler pin codes, the key will be able to rotate the plug and open the lock. When the actuator 706 cools, the spring force 704 will again bias it against the tumbler pin 710, such that as the key is removed from the plug, the pin will be raised by the retreating bitting surface of the key, causing the notch 712 to align with the spinner 710. As the notch 712 lines up with the spinner 710, the spring force 704 causes the spinner to engage the notch and again block the pin in an upward position within the plug.

The embodiment of FIG. 19 also includes thermal interlock protection. The ends of the shape memory alloy actuator 706 are anchored to bosses 720 extending from notches 722 of rotating pins 716. The pins 716 are biased by spring forces 718 to keep the actuator 706 taut against the slider. A shape memory alloy thermal interlock actuator 714 is also anchored to the bosses 720. The actuator 706 is made of a high transition temperature, low force wire, while the thermal actuator

714 is made of a low transition temperature, high force wire.

In the event that the lock is heated externally, the thermal interlock actuator 714 will contract, pulling in the bosses 720 against the spring forces 718 and creating slack in the actuator 706. Subsequent activation of the actuator wire 706 will thus merely absorb the imposed slack, preventing the actuator 706 from exerting enough force to move the slider 708 so as to disengage the spinner 700. The thermal interlock is automatically resettable, in that as the plug cools, the thermal actuator 714 will stretch back to its normal shape, allowing the spring forces 718 to rotate the pins 716 to remove the slack in the actuator 706.

Those skilled in the art will recognize the many advantages and great flexibility provided by the present invention. It should be recognized that the preferred embodiments discussed above have been described in detail so as to provide a full and complete disclosure thereof, and are only exemplary of the many possible variations and applications of the teachings of the present invention.

What is claimed is:

1. An electromechanical lock cylinder, comprising:
an outer shell having a bore formed therein and a
cavity extending from the bore into the shell;

5 a barrel disposed within the bore in the shell and
being rotatable relative thereto;

a side bar cooperating between the shell and the
barrel for selectively permitting and blocking rotation
of the barrel with respect to the shell, the side bar
10 having a first portion engaging the barrel and a second
portion removably received in the cavity in the shell,
the side bar being movable relative to the barrel and the
shell;

a blocking mechanism positionable in a blocking
15 position relative to the side bar, which position blocks
motion of the side bar with respect to the shell, and
thereby prevents rotation of said barrel, and also
positionable in an unblocking position relative to the
side bar, which permits the side bar to be moved relative
20 to the cavity in the shell to allow the barrel to be
rotated with respect to the shell;

an electrically activated drive mechanism
cooperating with the blocking mechanism to selectively
move the blocking mechanism from the blocking position to
25 the unblocking position in which the side bar moves out
of the cavity upon rotation of the barrel; and

control means for activating the electrically
activated drive mechanism in response to an authorized
attempt to operate the lock cylinder.

2. A lock cylinder according to claim 1, wherein
said blocking mechanism comprises a slider bar movable

relative to the side bar, wherein in said unblocking
position said slider bar is positioned adjacent to a
5 recess in said side bar for receiving said slider bar
upon rotation of said barrel.

3. A lock cylinder according to claim 1, wherein
said blocking mechanism comprises a slider bar movable
relative to the side bar, wherein in said unblocking
position a recess in said slider bar is positioned
5 adjacent to an extension in said side bar for receiving
said extension upon rotation of said barrel.

4. A lock cylinder according to claim 1, wherein
said electrically activated drive mechanism comprises a
shape memory alloy actuator for moving said blocking
mechanism to said unblocking position upon activation by
5 passing electric current through said actuator.

5. A lock cylinder according to claim 2, wherein
said electrically activated drive mechanism comprises a
shape memory alloy actuator for moving said slider bar to
said unblocking position upon activation by passing
electric current through said actuator.

6. A lock cylinder according to claim 5, wherein
said electrically activated drive mechanism further
comprises a rocker attached to said shape memory alloy
actuator and a pusher coupled between said rocker and
said slider bar.

7. A lock cylinder according to claim 3, wherein
said electrically activated drive mechanism comprises a
shape memory alloy actuator for moving said slider bar to

said unblocking position upon activation by passing electric current through said actuator.

8. A lock cylinder according to claim 7, wherein said electrically activated drive mechanism further comprises a spring applying a force to said slider bar for biasing said slider bar in said blocking position when said shape memory alloy actuator is not activated.

9. A lock cylinder according to claim 4, wherein said shape memory alloy actuator is made of nitinol.

10. A lock cylinder according to claim 9, wherein said shape memory alloy actuator is in the form of a wire.

11. A lock cylinder according to claim 5, wherein said shape memory alloy actuator is made of nitinol.

12. A lock cylinder according to claim 7, wherein said shape memory alloy actuator is made of nitinol.

13. An electromechanical lock cylinder, comprising:
an outer shell having a bore formed therein and a cavity extending from the bore into the shell;

a barrel disposed within the bore in the shell and being rotatable relative thereto;

a blocking mechanism for normally blocking rotation of said barrel and being movable to an unblocking position to permit rotation of said barrel; and

means cooperating with the blocking mechanism for selectively moving the blocking mechanism from the blocking position to the unblocking position upon

occurrence of a predetermined condition, said moving means comprising a shape memory alloy actuator activated by passing electrical current therethrough.

14. A lock cylinder according to claim 13, further comprising a side bar cooperating between the shell and the barrel for selectively permitting and blocking rotation of the barrel with respect to the shell, the side bar having a first portion engaging the barrel and a second portion removably received in the cavity in the shell, the side bar being movable relative to the barrel and the shell;

said blocking mechanism including a slider bar movable relative to the side bar, wherein in said unblocking position a recess in said slider bar is positioned adjacent to an extension in said side bar for receiving said extension upon rotation of said barrel.

15. A lock cylinder according to claim 13, further comprising a side bar cooperating between the shell and the barrel for selectively permitting and blocking rotation of the barrel with respect to the shell, the side bar having a first portion engaging the barrel and a second portion removably received in the cavity in the shell, the side bar being movable relative to the barrel and the shell;

said blocking mechanism including a slider bar movable relative to the side bar, wherein said slider bar is positioned adjacent to a recess in said side bar for receiving said slider bar upon rotation of said barrel.

16. A lock cylinder according to claim 15, wherein said blocking mechanism further comprises a rocker

attached to said shape memory alloy actuator and a pusher coupled between said rocker and said slider bar.

17. A lock cylinder according to claim 13, further comprising control means, responsive to electrical data input from a key inserted into said lock cylinder, for causing said electrical current to be passed through said shape memory alloy actuator.

18. A lock cylinder according to claim 13, wherein said shape memory alloy actuator comprises a nitinol wire.

19. A lock cylinder according to claim 13, further comprising thermal interlock means for preventing operation of the lock cylinder upon external heating of said lock cylinder.

20. A lock cylinder according to claim 13, further comprising a plurality of tumbler pins cooperating between the shell and the barrel so as to block rotation of the barrel with respect to the shell in the absence of a properly bitted key, and to allow rotation of the barrel with respect to the shell upon insertion of a properly bitted key;

said blocking mechanism comprising a spinner which retractably engages at least one of said plurality of tumbler pins to prevent said at least one tumbler from moving to allow rotation of said barrel, said shape memory alloy actuator being activated to retract said spinner from engagement with said at least one tumbler pin.

21. An electromechanical lock cylinder, comprising:
an outer shell having a bore formed therein and a
cavity extending from the bore into the shell;

5 a barrel disposed within the bore in the shell and
being rotatable relative thereto;

a blocking mechanism located in said barrel for
normally blocking rotation of said barrel and being
movable to an unblocking position to permit rotation of
said barrel; and

10 electronic control means located at least in said
lock cylinder cooperating with the blocking mechanism to
selectively move the blocking mechanism from the blocking
position to the unblocking position upon occurrence of a
predetermined condition.

22. A lock cylinder according to claim 21, further
comprising a nitinol wire actuator cooperating with said
electronic control means and said blocking mechanism for
causing said blocking mechanism to move to said
5 unblocking position upon passing of current through said
wire, under control of said control means.

23. A lock cylinder according to claim 22, further
comprising a side bar cooperating between the shell and
the barrel for selectively permitting and blocking
rotation of the barrel with respect to the shell, the
5 side bar having a first portion engaging the barrel and a
second portion removably received in the cavity in the
shell, the side bar being movable relative to the barrel
and the shell;

10 said blocking mechanism including a slider bar
movable relative to the side bar, wherein in said
unblocking position a recess in said slider bar is

positioned adjacent to an extension in said side bar for receiving said extension upon rotation of said barrel.

24. A lock cylinder according to claim 22, further comprising a side bar cooperating between the shell and the barrel for selectively permitting and blocking rotation of the barrel with respect to the shell, the side bar having a first portion engaging the barrel and a second portion removably received in the cavity in the shell, the side bar being movable relative to the barrel and the shell;

said blocking mechanism including a slider bar movable relative to the side bar, wherein said slider bar is positioned adjacent to a recess in said side bar for receiving said slider bar upon rotation of said barrel.

25. A lock cylinder according to claim 24, wherein said blocking mechanism further comprises a rocker attached to said nitinol wire actuator and a pusher coupled between said rocker and said slider bar.

26. A lock cylinder, comprising:

a shape memory alloy actuator for enabling operation of said lock cylinder by selective controlled application of heat to said actuator; and

thermal interlock protection means for preventing operation of said lock cylinder in the event of external heating of said lock cylinder.

ABSTRACT OF THE DISCLOSURE

An electromechanical cylinder lock includes an outer lock shell and a rotatable lock barrel located therein which is controlled by dual locking features. A side bar or fence selectively blocks and permits rotation of the barrel with respect to the shell in response to insertion of a key into a keyway in the barrel. A slider bar is movable between a blocking position in which the side bar is prevented from permitting rotation of the barrel, and an unblocking position in which the side bar permits rotation of the barrel. Alternately, a blocking mechanism is provided to block motion of tumbler pins in the cylinder lock. A shape memory alloy actuator, such as a wire made of nitinol, disposed in the barrel is activated by an electric current in response to determination by an electronic control device whether an attempt to open the lock is authorized. Thermal interlock protection from external heating of the lock is also provided.

454720 "encl" 024300000

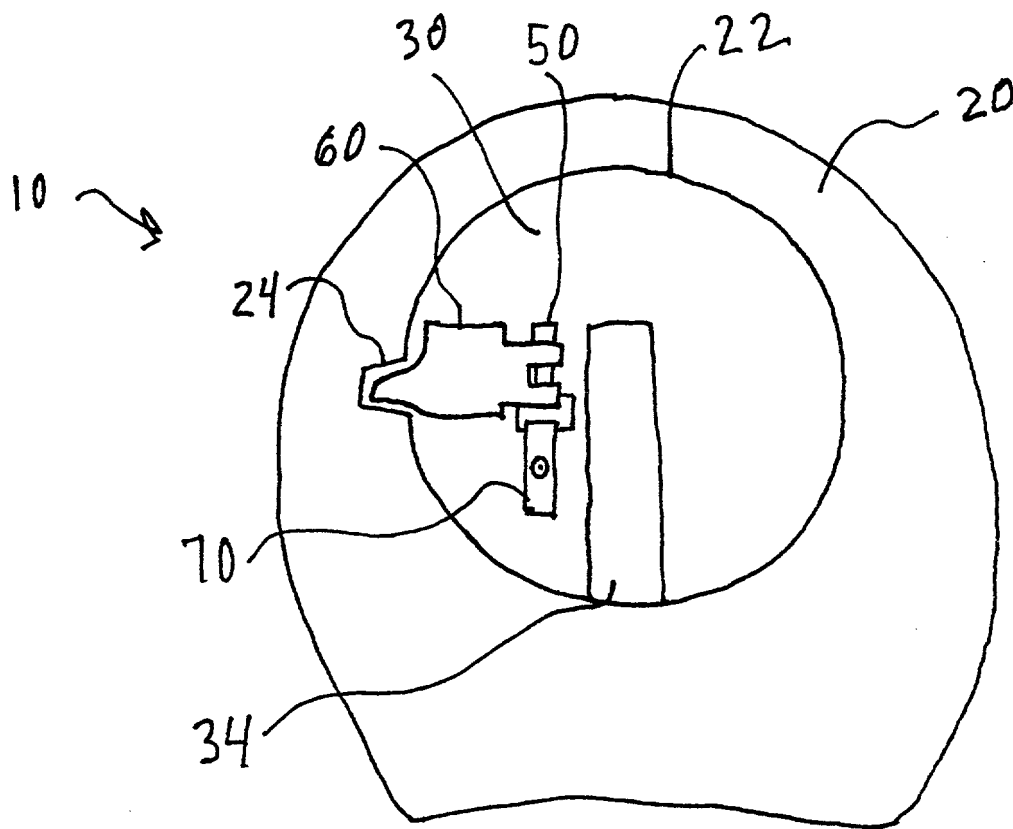


FIG. 1

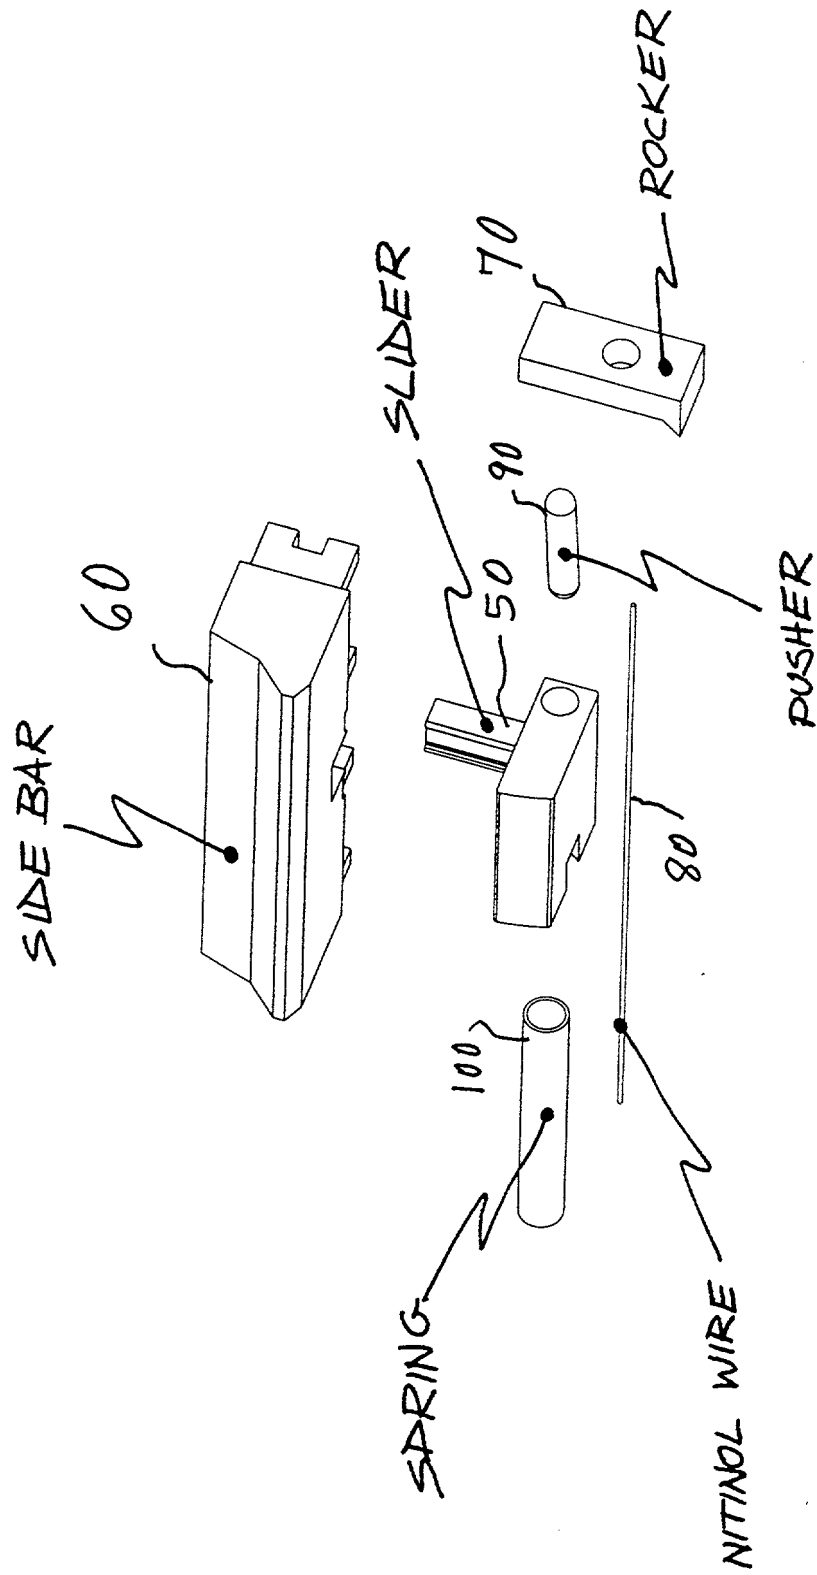
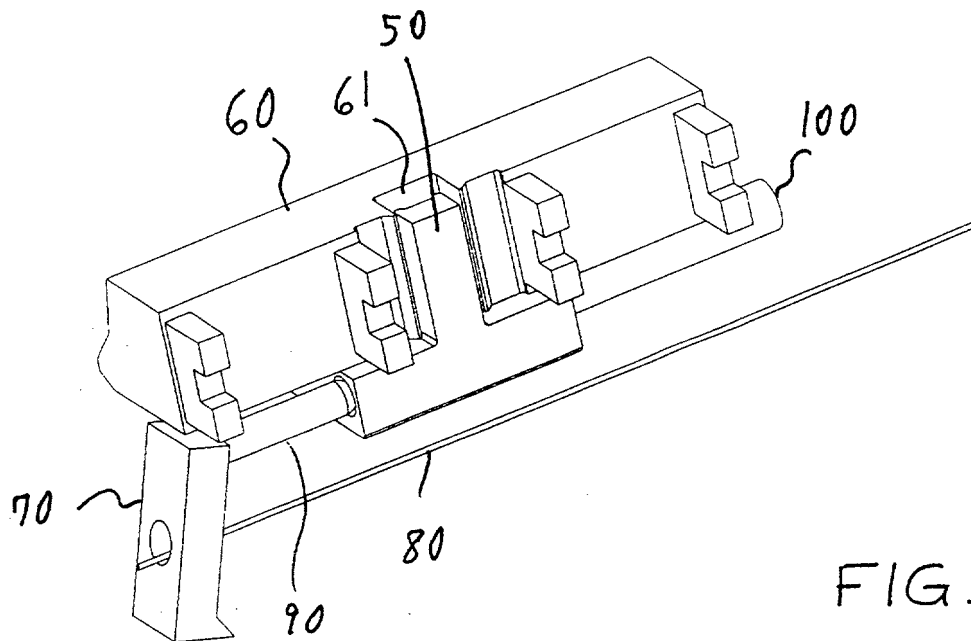
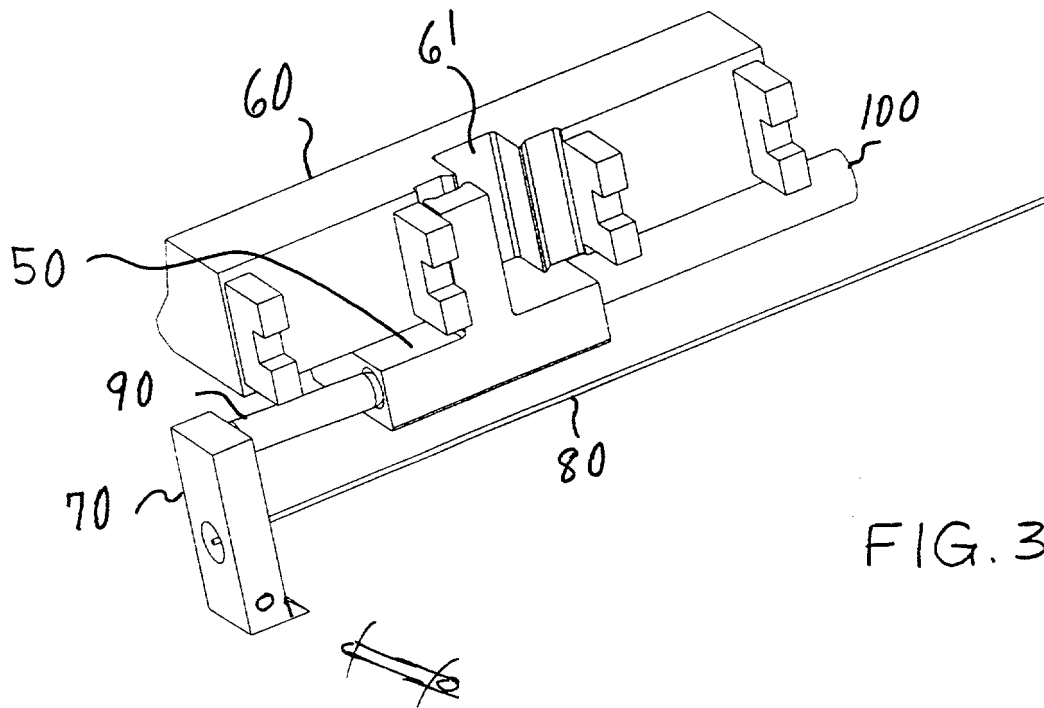


FIG. 2

0800743 02449



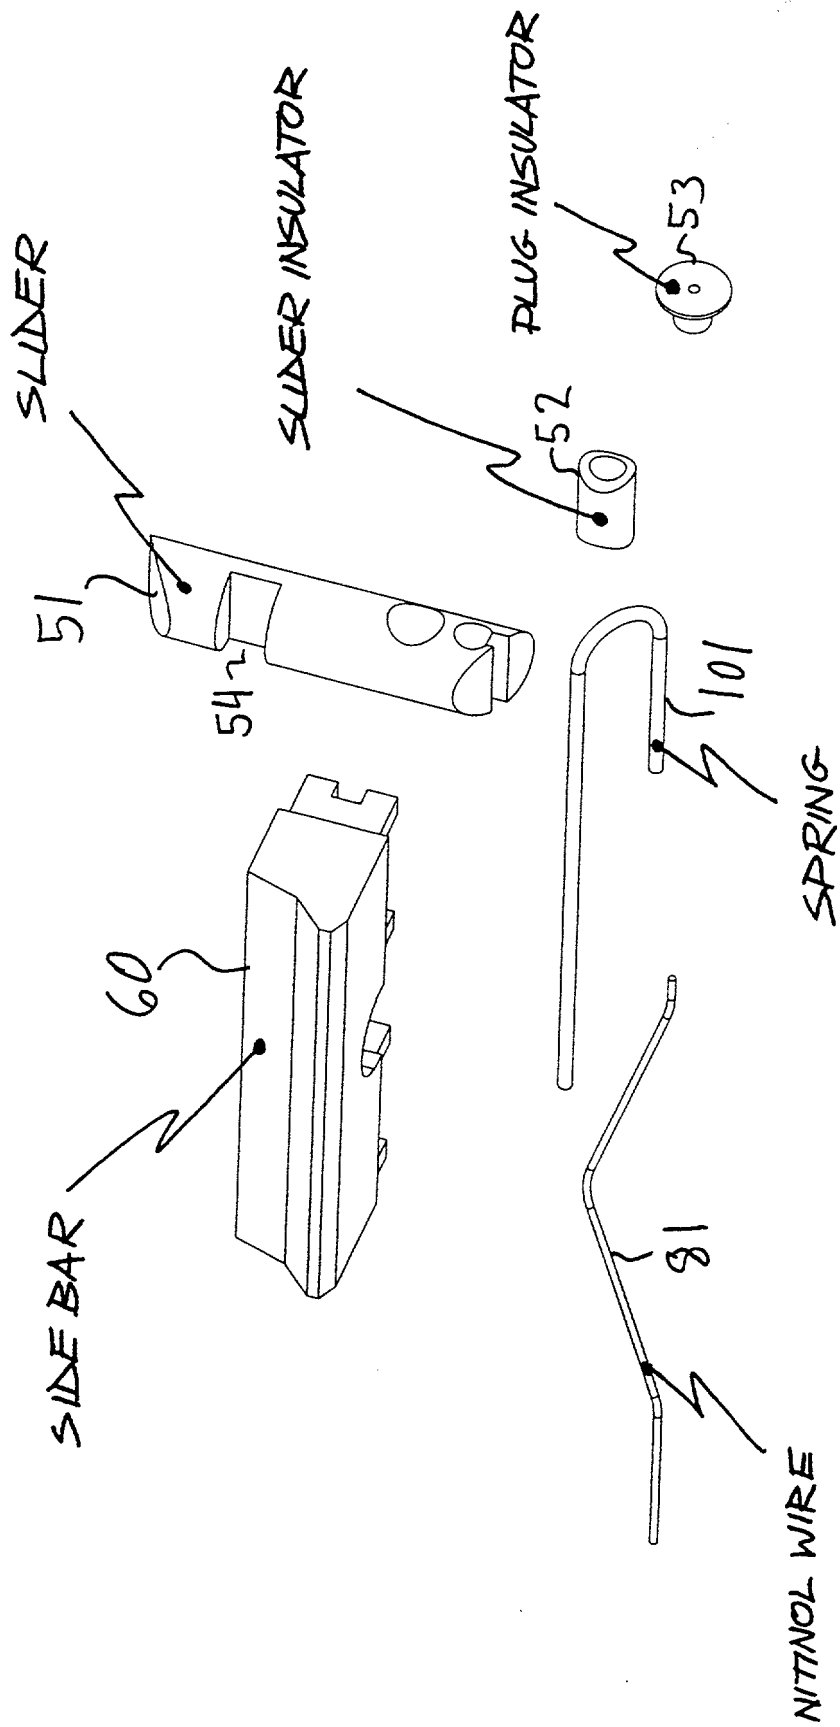
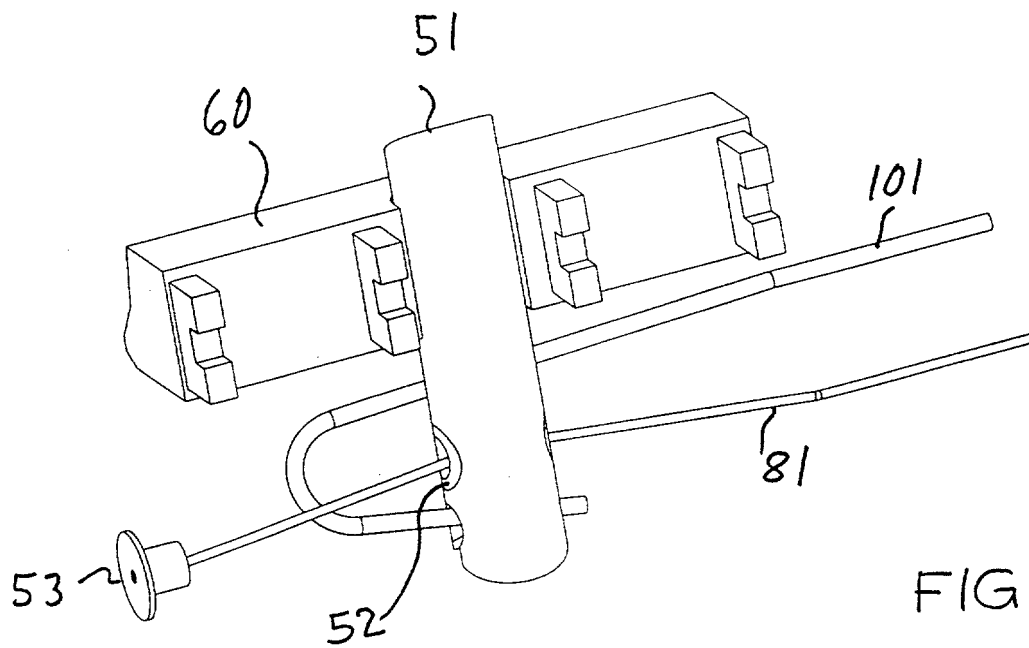
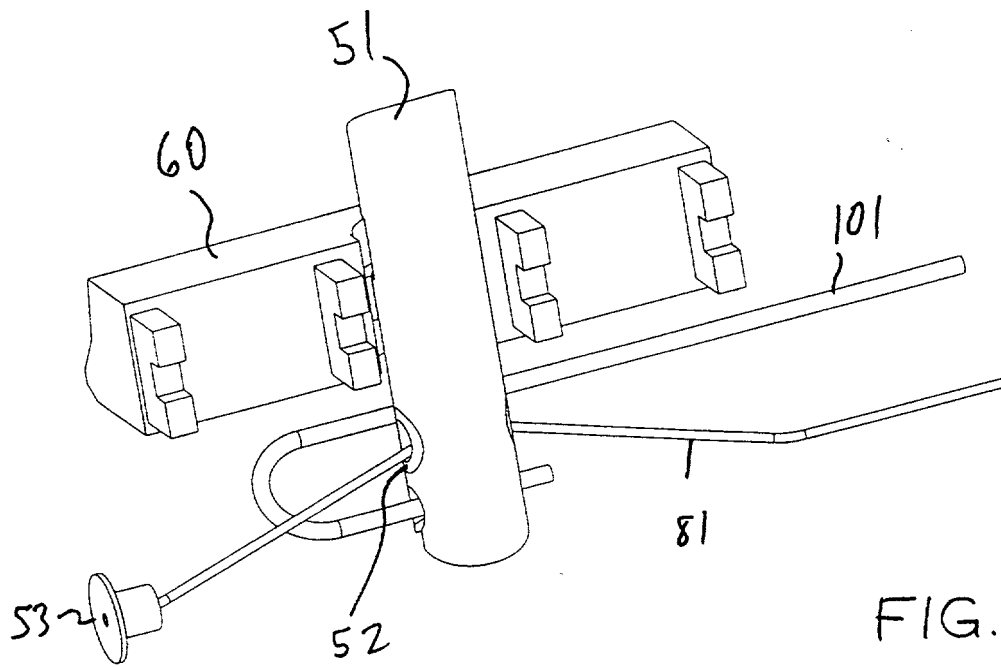
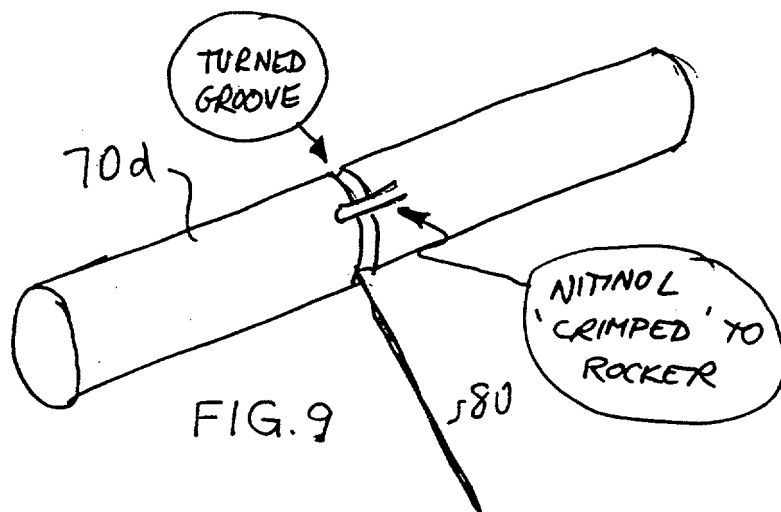
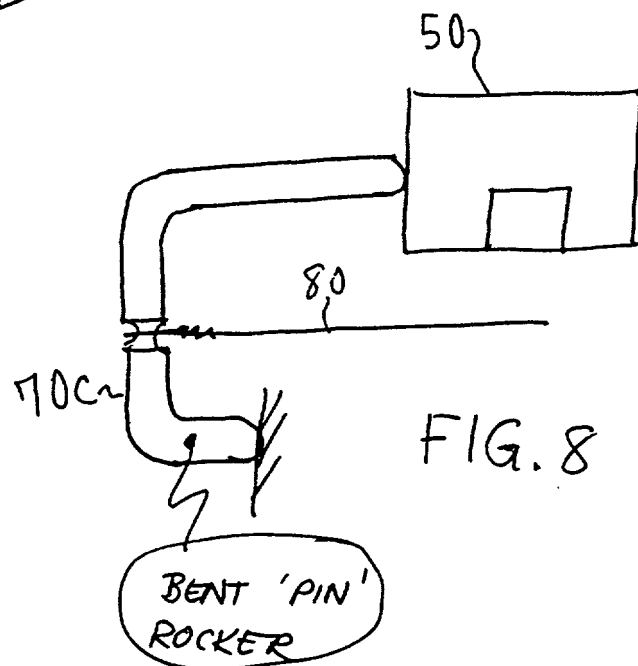
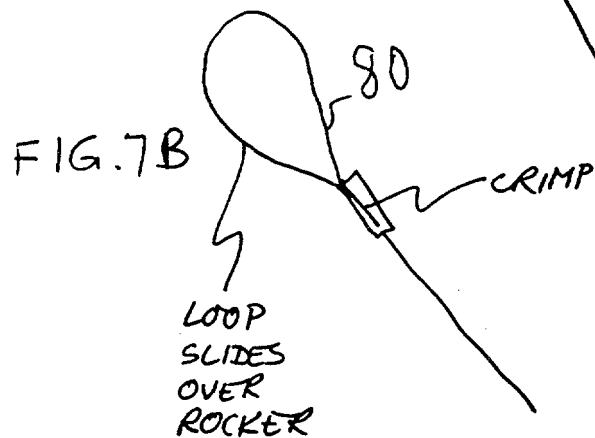
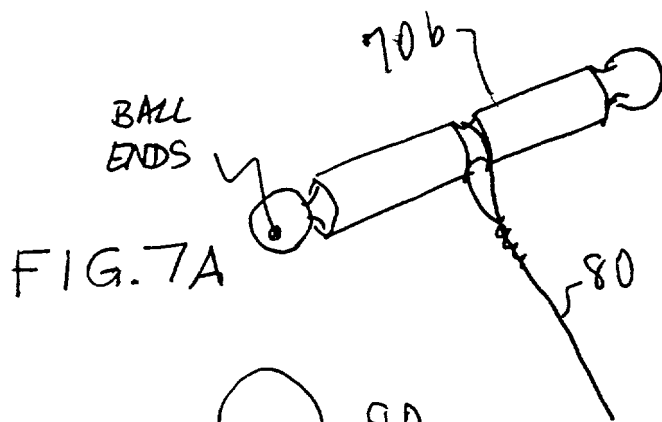
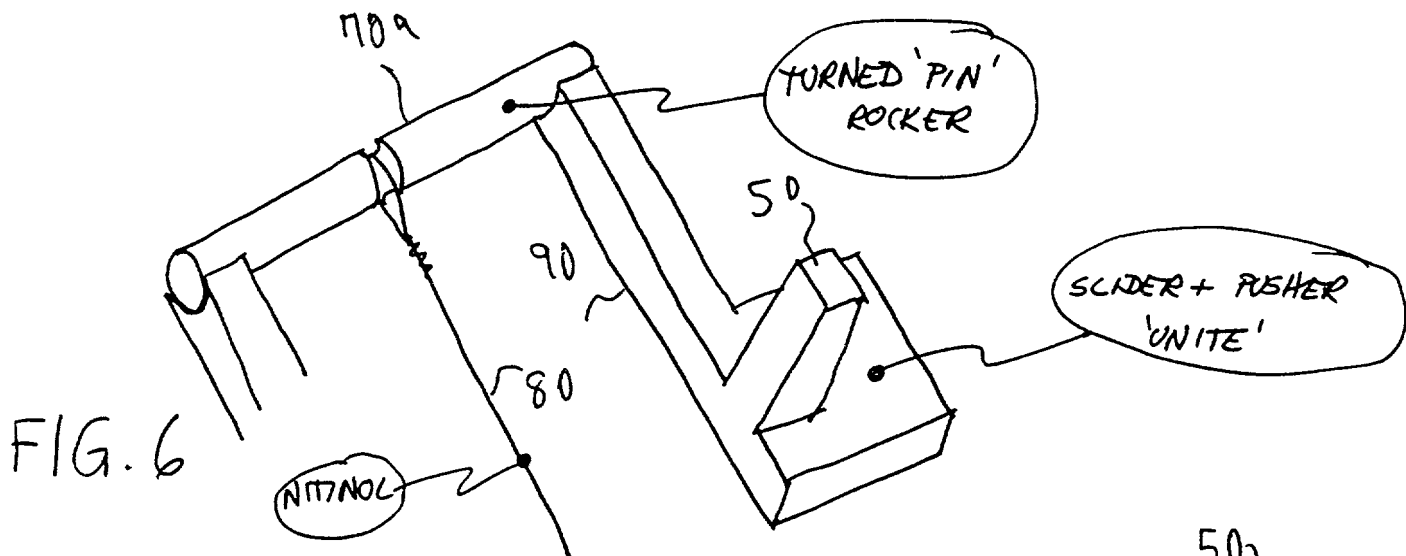


FIG. 4





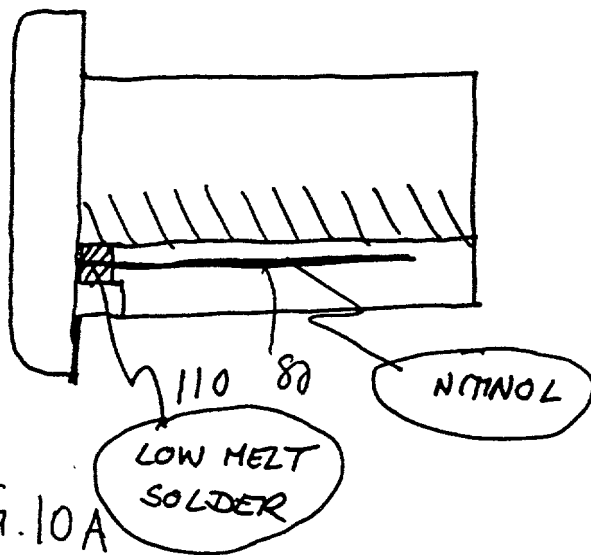


FIG. 10A

NITINOL OPTIONS A+B


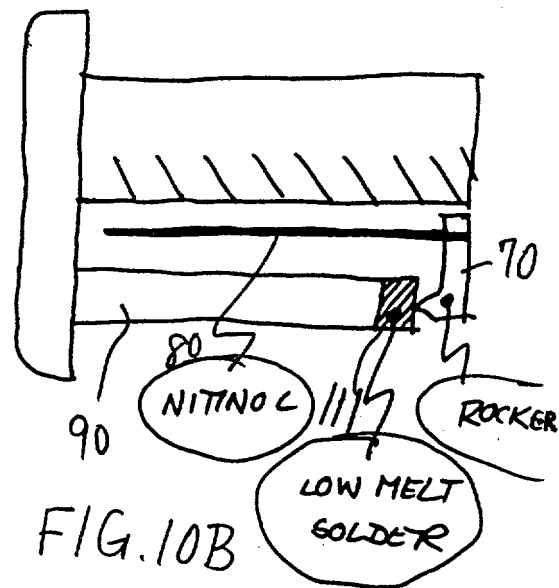


FIG. 10B


NITINOL OPTION A

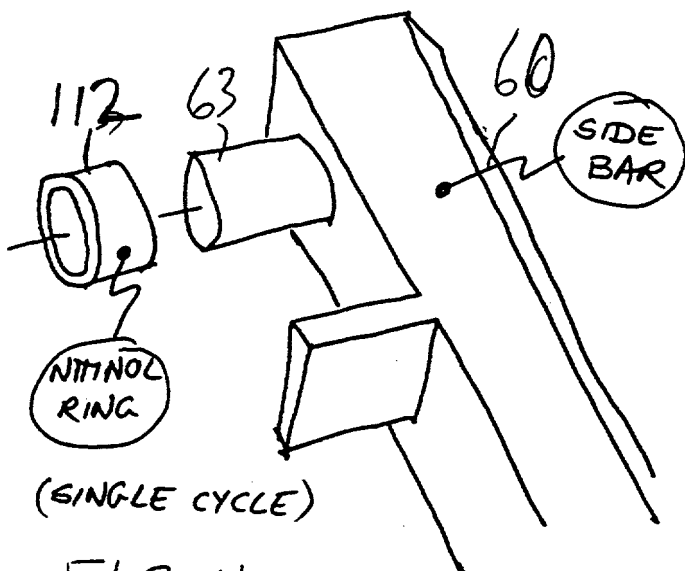

(SINGLE CYCLE)



FIG. 11

NITINOL OPTIONS A+B

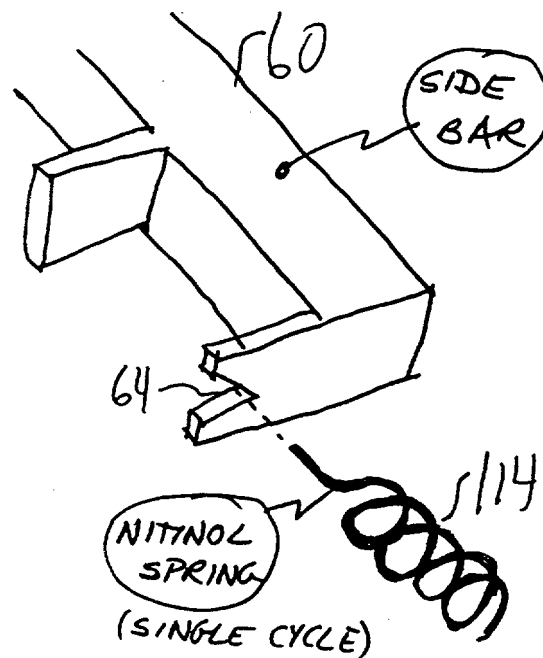


(SINGLE CYCLE)

NITINOL OPTIONS A+B
FIG. 12

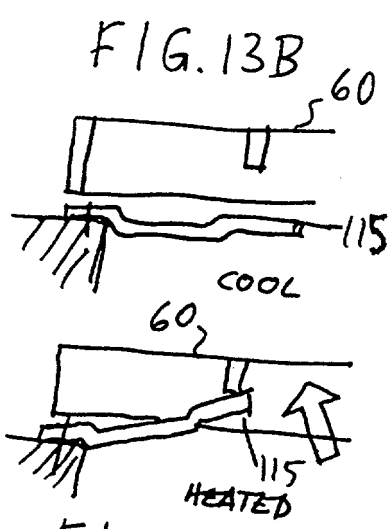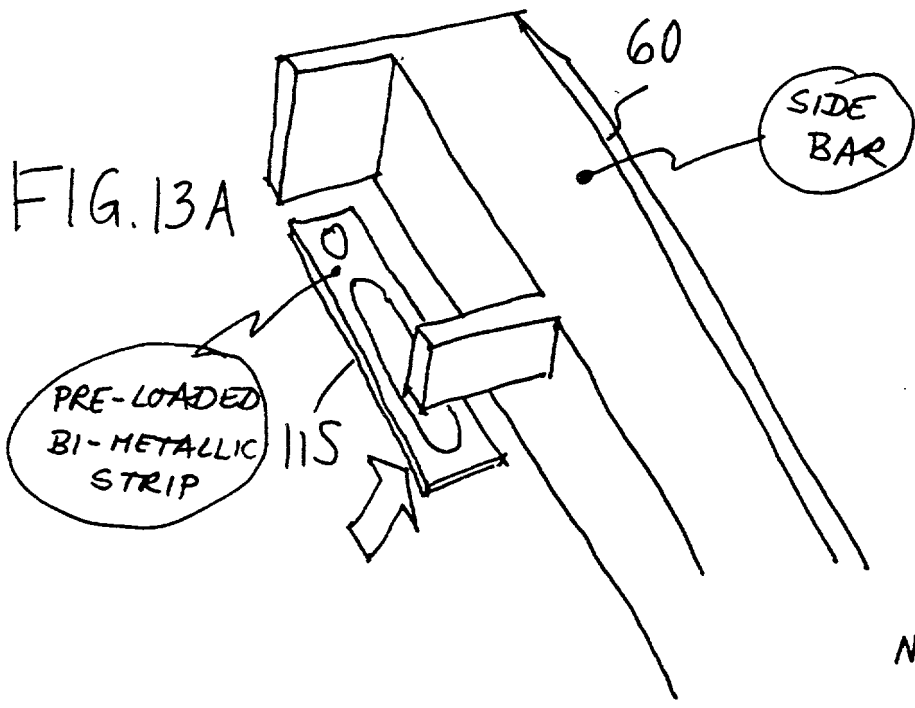


NITINOL OPTIONS A+B

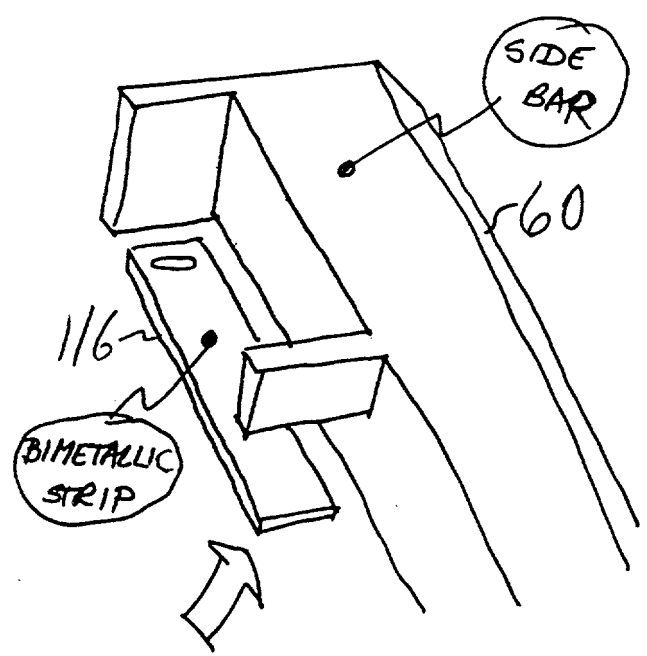

NITINOL OPTIONS A+B


FIG. 14

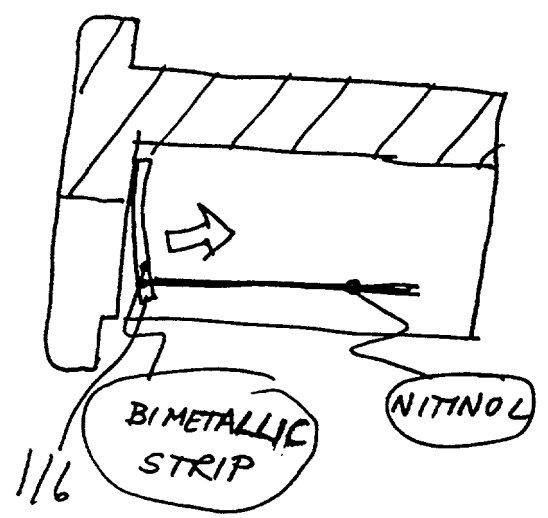



NITINOL OPTIONS A+B

FIG. 15

20250744 0349

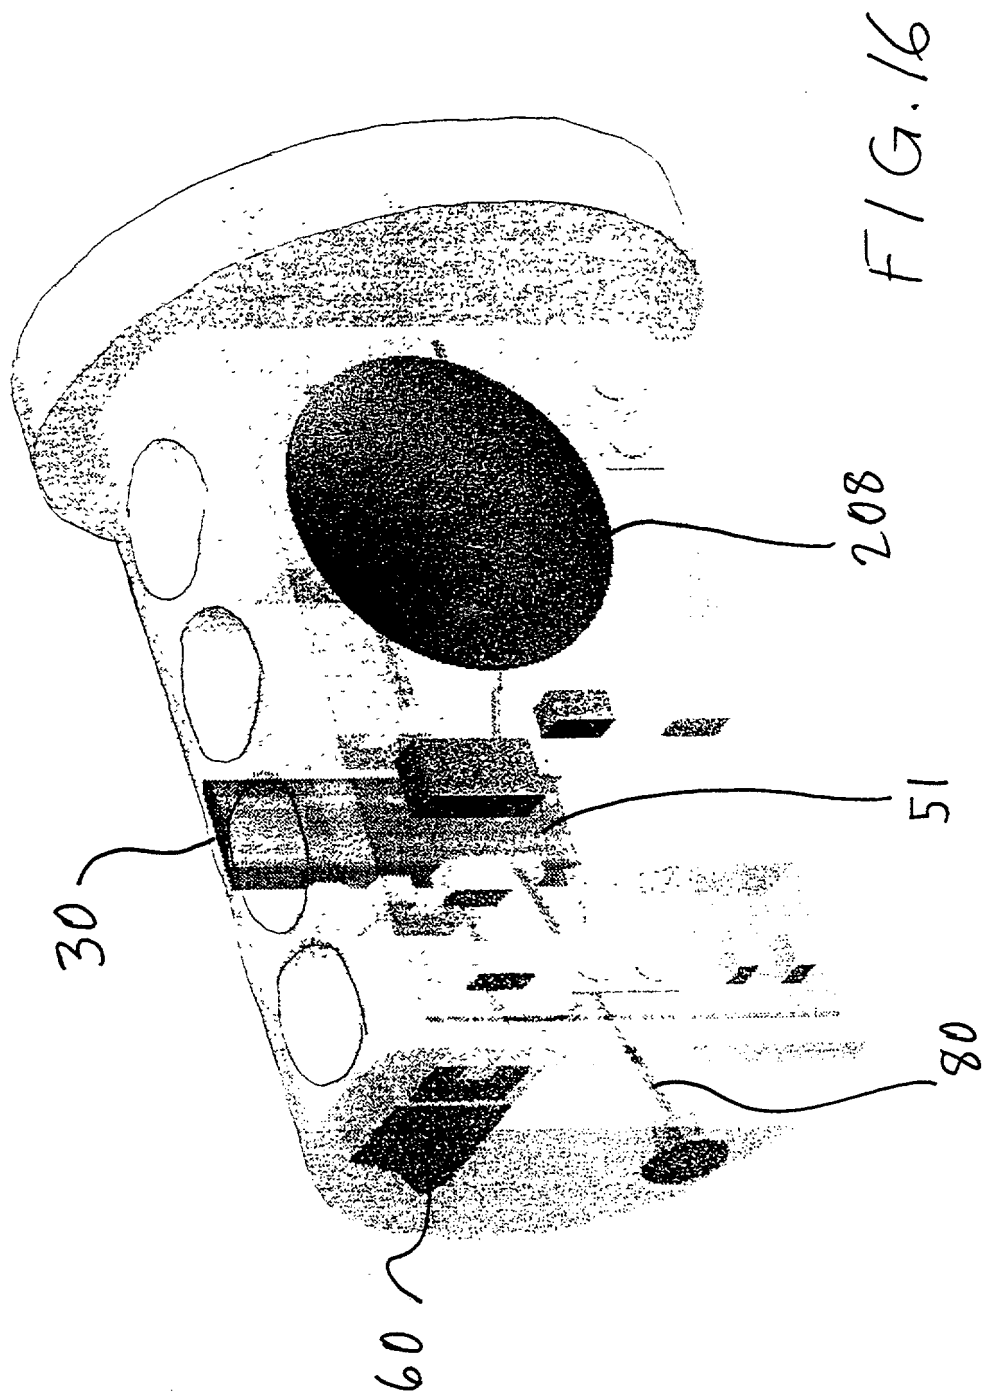

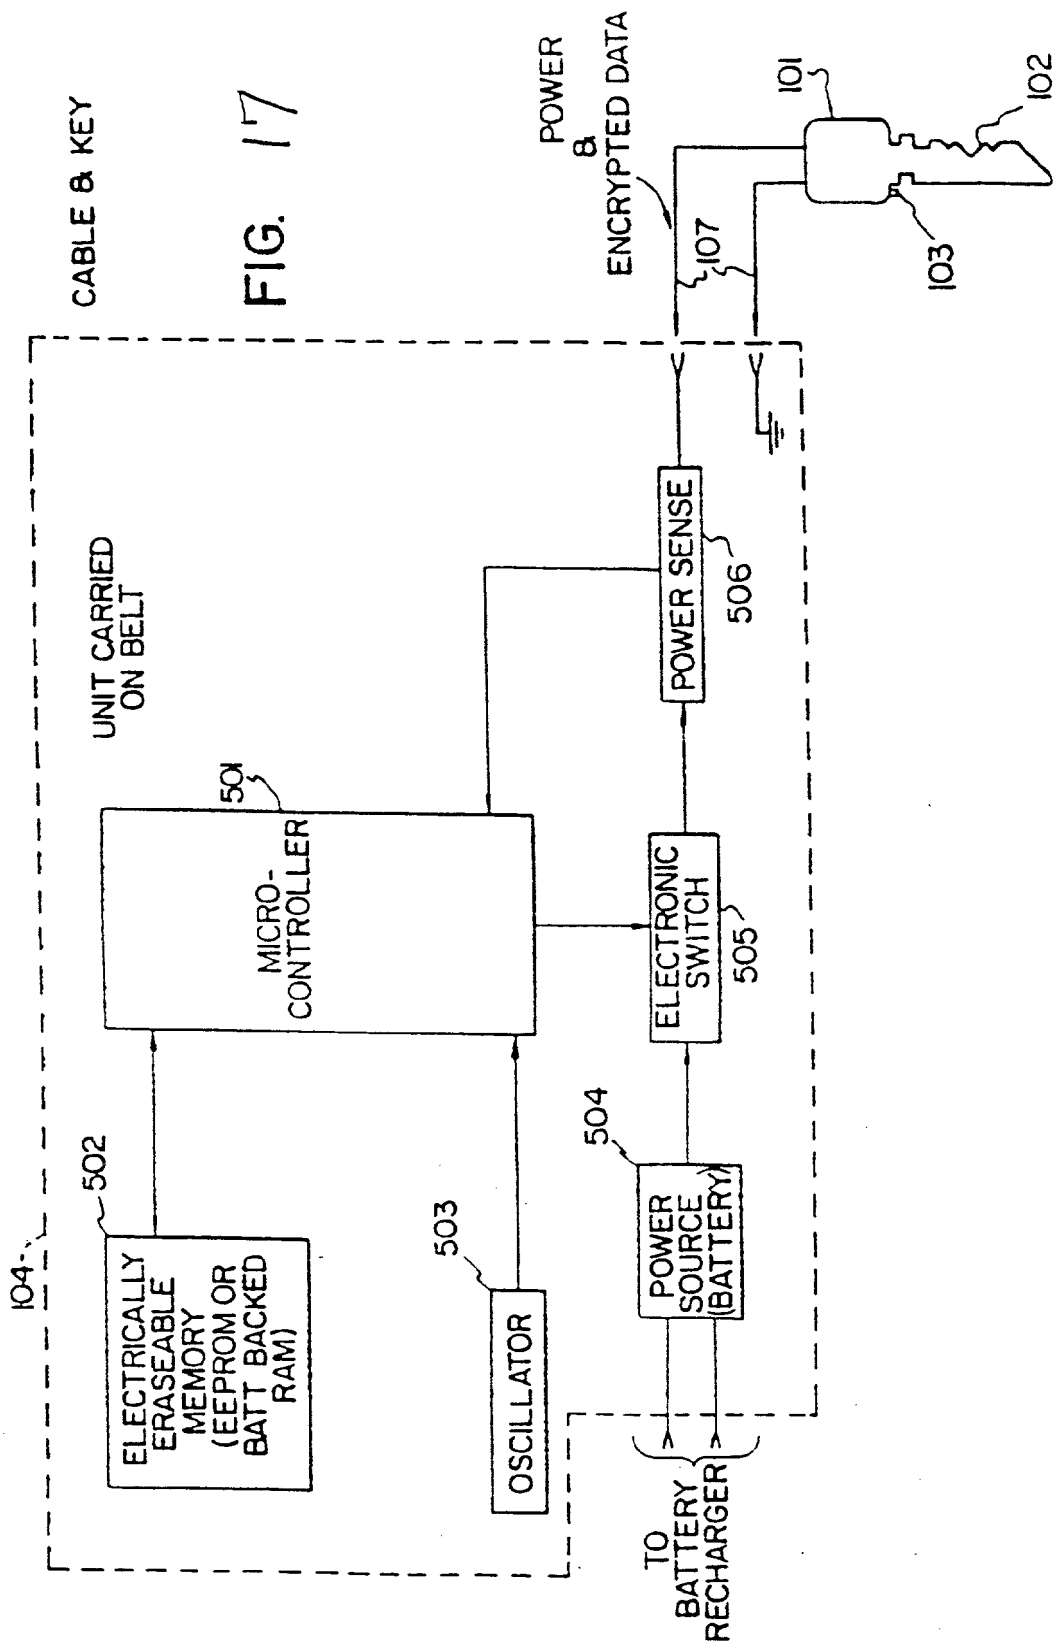

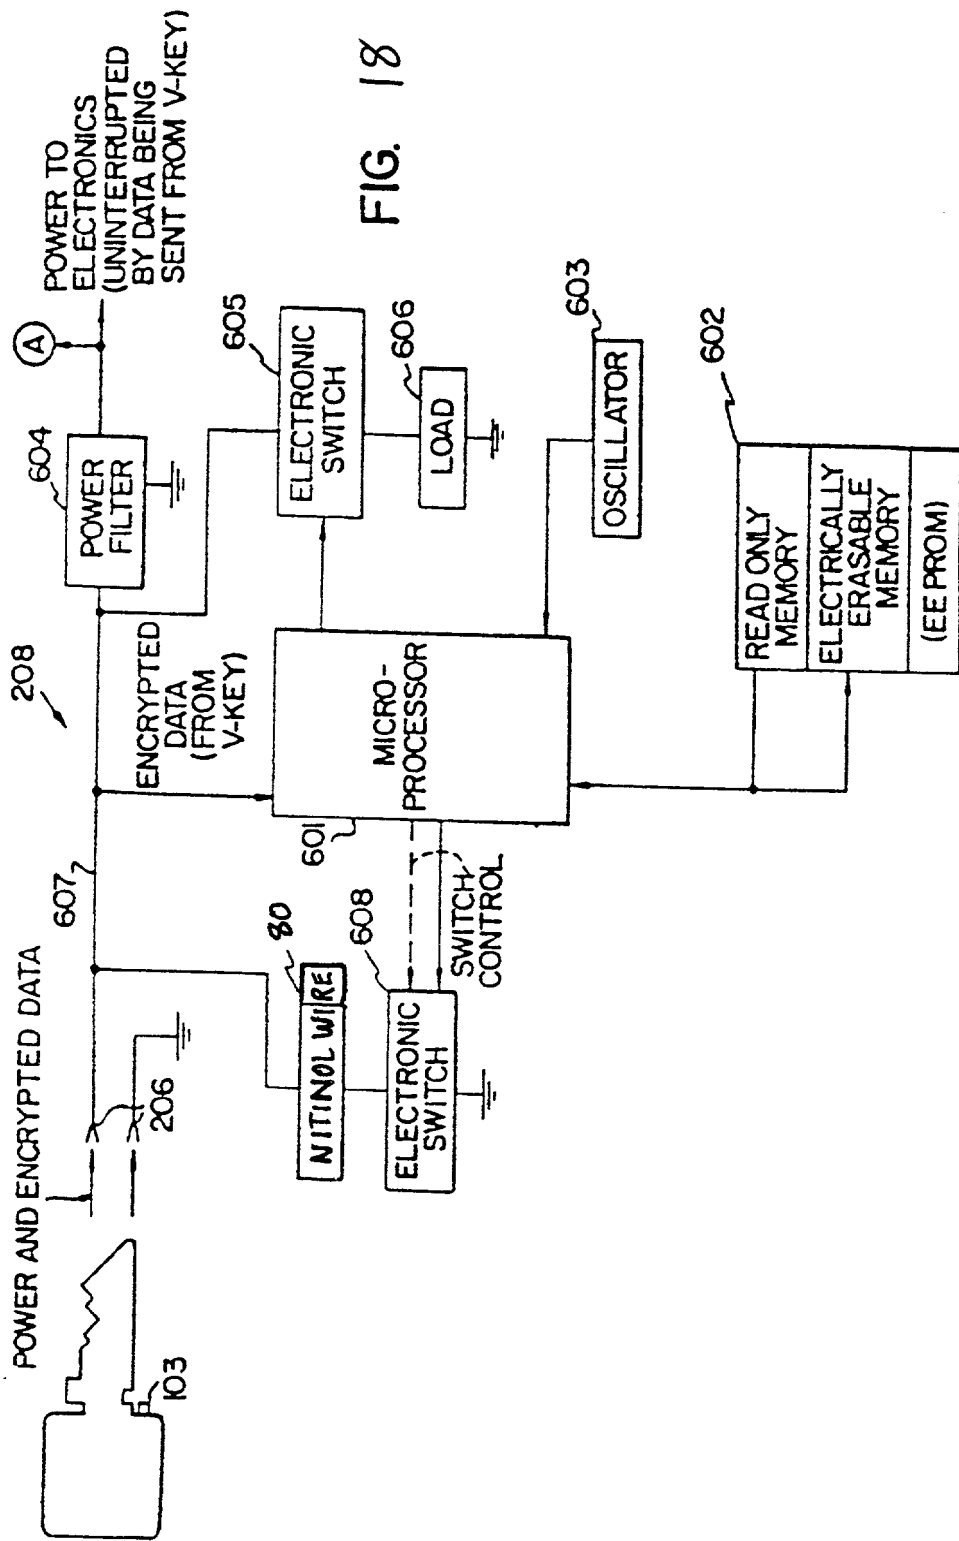

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am an original, first and joint inventor of the subject matter which is claimed and for which a patent is sought, on the invention entitled ELECTROMECHANICAL CYLINDER LOCK, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to patentability in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

No claim for foreign priority benefits under Title 35, United States Code, § 119 is made and no corresponding foreign applications for patent or inventor's certificate having a filing date before that of the present application have been filed.

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to ROTHWELL, FIGG, ERNST & KURZ, p.c., Suite 701-E, 555 13th Street, N.W., Washington, D.C 20004

G. Franklin Rothwell, Reg. No. 18,125
Barbara G. Ernst, Reg. No. 30,377
Lawrence G. Norris, Reg. No. 18,034
Vincent M. DeLuca, Reg. No. 32,408
Jeffrey B. McIntyre, Reg. No. 36,867
Michael G. Sullivan, Reg. No. 35,377
Moon Soo Lee, Reg. No. 37,377
Kenneth M. Fagin, Reg. No. 37,615
Michael J. Donnelly, Reg. No. 38,126

E. Anthony Figg, Reg. No. 27,195
George R. Reppe, Reg. No. 31,414
Bart G. Newland, Reg. No. 31,282
Celine Jimenez Crowson, Reg. No. 40,357
Joseph A. Hynds, Reg. No. 34,627
Mark I. Bowditch, Reg. No. 40,315
Robert J. Jondle, Reg. No. 33,915
Stephen B. Parker, Reg. No. 36,631

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1. Inventor's Signature Peter Field Date 5 Feb 97
Inventor's Name Peter Field Citizenship U.S.A.
Residence (City) SALEM (State/Foreign Country) VA
Mailing Address P.O. Box 104, SALEM VA 24153

2. Inventor's Signature Duncan Kerr Date 1/20/97
Inventor's Name Duncan Kerr Citizenship UNITED KINGDOM
Residence (City) SAN FRANCISCO (State/Foreign Country) CA
Mailing Address IDEO, PIER 28 ANNEX, THE EMBARCADERO,
SAN FRANCISCO, CA 94114.